




Cranked Wheel Guide 139 & 168 1800mm or 2500mm Galvanised or Galvanised & Yellow

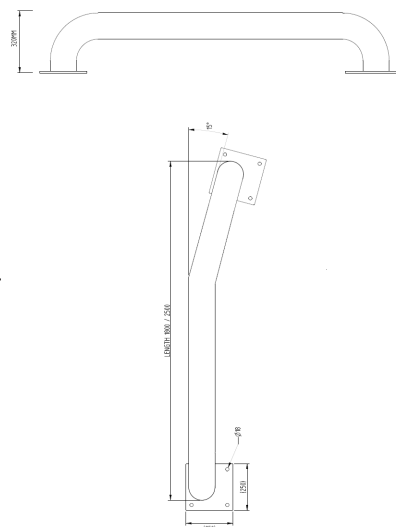

The AUTOPA Cranked HGV wheel guides provide a solid, steel kerb to allow the safe reversing into loading bays by wagons and delivery trucks. Also suitable for protecting racking, equipment and machines from potential damage caused by forklift trucks and moving vehicles.

Available in 1800mm or 2500mm lengths, and 139mm or 168mm diameter. The AUTOPA cranked wheel guide is suitable for a wide range of warehouse or factory environments.

Manufactured from galvanised mild steel, with the option of powder coated yellow (available extra) providing a visual and physical aid for drivers.

Sold in pairs. Each pair will include 1 x left hand crank and 1 x right hand crank.

Available bolt down only.

Part Number	Description	Weight (kg/Pair)
138 177 946	139mm x 1800mm Galvanised	76kg
138 177 947	139mm x 1800mm Galvanised & Yellow	76kg
138 177 956	168mm x 1800mm Galvanised	100kg
138 177 957	168mm x 1800mm Galvanised & Yellow	100kg
138 177 948	139mm x 2500mm Galvanised	106kg
138 177 949	139mm x 2500mm Galvanised & Yellow	106kg
138 177 958	168mm x 2500mm Galvanised	134kg
138 177 959	168mm x 2500mm Galvanised & Yellow	134kg

Product details

- Available bolt down only
- Square flange plate – 250mm sq x 10mm
- 8 x 16mm bolts required per wheel guide
- 320mm height
- 5mm wall thickness
- 15° crank

Installation & use

Bolt down to a suitable concrete surface.

Telescopic, removable and concrete in are supplied with welded fixing spikes to ensure firm ground anchorage into concrete.

Telescopic, removable and concrete in require a suitable excavated hole for installing into concrete.

Products are guaranteed for 12 months (if installed and used correctly).



www.autopa.co.uk
+44 (0)1788 550556

AUTOPA Limited
Cottage Leap, Rugby, Warwickshire CV21 3XP

