


## Hooped Perimeter Barrier with Horizontal Rail 90mm Diameter Galvanised, Bolt Down



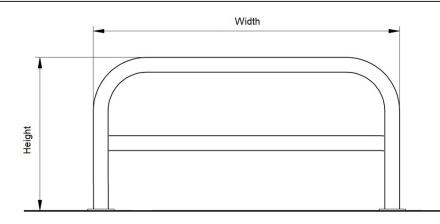

Perimeter Barriers are designed to help secure site perimeters and provide a permanent obstacle to vehicle access, to mark boundaries, define trolley parks and protect vulnerable door entrances and exits.

Suited to sites where aesthetics and security are equally important, perimeter barriers are commonly found outside car showrooms acting as protection for the cars on the forecourt without impeding a customer's view of the vehicles.

Available in a variety of heights and widths, available as concrete in, bolt down or removable for occasional access.

Available as galvanised as standard. Stainless steel, galvanised and colour coated available extra.



Part Number	Description, Height above ground x overall width	Weight (kg)
138 178 900H	500 x 750 with Horizontal Rail, Galvanised - Bolt Down	17kg
138 178 901H	500 x 1000 with Horizontal Rail, Galvanised - Bolt Down	20kg
138 178 906H	500 x 1500 with Horizontal Rail, Galvanised - Bolt Down	26kg
138 178 912H	500 x 2000 with Horizontal Rail, Galvanised - Bolt Down	32kg
138 178 916H	750 x 1000 with Horizontal Rail, Galvanised - Bolt Down	23kg
138 178 922H	750 x 1500 with Horizontal Rail, Galvanised - Bolt Down	29kg
138 178 928H	750 x 2000 with Horizontal Rail, Galvanised - Bolt Down	36kg
138 178 931H	1000 x 1000 with Horizontal Rail, Galvanised - Bolt Down	26kg
138 178 937H	1000 x 1500 with Horizontal Rail, Galvanised - Bolt Down	33kg
138 178 944	1000 x 2000 with Horizontal Rail, Galvanised - Bolt Down	39kg

## **Product details**

- 3mm wall thickness
- 6 bolts required per barrier
- Round flange plate 180mm x 5mm

- Colour coated options available extra
- · Complete with horizontal rail

## Installation & use

Bolt down to a suitable concrete surface.

Telescopic, removable and concrete in are supplied with welded fixing spikes to ensure firm ground anchorage into concrete.

Telescopic, removable and concrete in require a suitable excavated hole for installing into concrete.

Products are guaranteed for 12 months (if installed and used correctly).



www.autopa.co.uk +44 (0)1788 550556

