

Fixed Bollard 900mm Above Ground 48mm - 204mm Diameter Stainless Steel - Bolt Down






The stainless steel range of 900mm tall Fixed Bollards are suitable for a range of applications.

The round bollards are available in sizes from 48mm to 204mm diameter stainless steel grade 304 tube. The Fixed Bollard is available with extended legs for casting into concrete or a flange plate for bolting down.

The Stainless Steel Fixed Bollard is ideal for situations where a high quality aesthetically pleasing way to mark boundaries is required.

Removable versions also available.

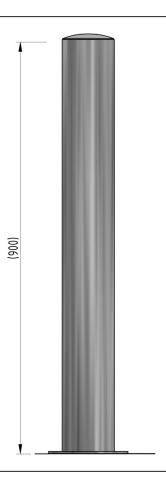

Part Number	Diameter and Fixing Detail	<u>Weight</u>
138 125 050	48mm Stainless Steel Grade 304	3kg
138 125 059	60mm Stainless Steel Grade 304	3kg
138 125 074	76mm Stainless Steel Grade 304	4kg
138 125 087	89mm Stainless Steel Grade 304	5kg
138 125 110	101mm Stainless Steel Grade 304	6kg
138 125 121	114mm Stainless Steel Grade 304	7kg
138 125 124	129mm Stainless Steel Grade 304	7kg
138 125 143	139mm Stainless Steel Grade 304	8kg
138 125 155	154mm Stainless Steel Grade 304	9kg
138 125 174	168mm Stainless Steel Grade 304	10kg
138 125 199	204mm Stainless Steel Grade 304	12kg

Product details

- 2mm wall thickness
- 3 bolts required per bollard (bolt down)

- Round flange plate 5mm thick, diameter dependant on bollard diameter
- Flange plate diameter ranges from 120mm 305mm

Installation & use

Bolt down to a suitable concrete surface.

Telescopic, removable and concrete in are supplied with welded fixing spikes to ensure firm ground anchorage into concrete.

Telescopic, removable and concrete in require a suitable excavated hole for installing into concrete.

Products are guaranteed for 12 months (if installed and used correctly).



www.autopa.co.uk +44 (0)1788 550556

