


down.

## Plain Round Bollard 750mm Above Ground 168mm - 323mm Diameter Galvanised & Yellow - Concrete In

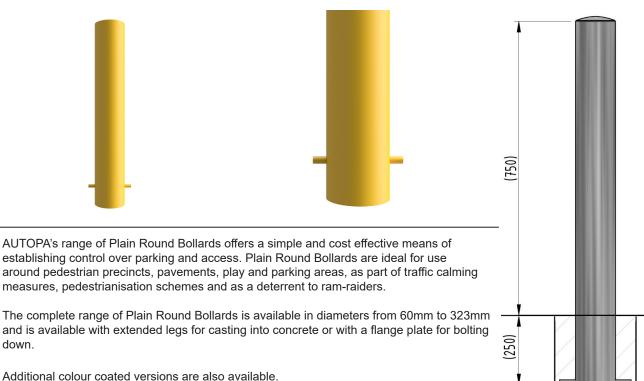

Part Number	<u>Diameter</u>	Weight (kg)
138 121 743Y	168mm Galvanised & Yellow	<b>20</b> kg
138 121 783Y	193mm Galvanised & Yellow	23kg
138 121 942Y	219mm Galvanised & Yellow	26kg
138 122 101Y	273mm Galvanised & Yellow	41kg
138 122 201Y	323mm Galvanised & Yellow	49kg

## **Product details**

- 5mm wall thickness 168mm 219mm
- 6.3mm wall thickness 273mm 323mm
- Concrete in 250mm (below ground)

Complete with a welded steel cap

Installation & use

Bolt down to a suitable concrete surface.

Telescopic, removable and concrete in are supplied with welded fixing spikes to ensure firm ground anchorage into concrete. Telescopic, removable and concrete in require a suitable excavated hole for installing into concrete. Products are guaranteed for 12 months (if installed and used correctly).



www.autopa.co.uk +44 (0)1788 550556

