

Removable Bollard 1000mm Above Ground 60mm - 219mm Diameter Galvanised & Yellow






The Removable Bollard offers an effective, simple and robust way to protect premises and vehicles. The simple tab and padlock system provides an easy to operate solution for locking the bollard in place. Removable Bollards are particularly suitable for locations where occasional access is required.

Yellow bollards are also suitable for use where high visability is paramount and can be used around pedestrian precincts, pavements, play and parking areas, as part of traffic calming measures, pedestrianisation schemes and as a deterrent to ram-raiders. The Removable Bollard is available in diameters from 60mm through to 219mm. Padlock to secure is available at an extra cost.

The Removable Bollard 1000 is ideal for protecting vehicle forecourts, commercial premises, car parks and domestic driveways and can be used in conjunction with fixed bollards as part of a security system for all types of premises.

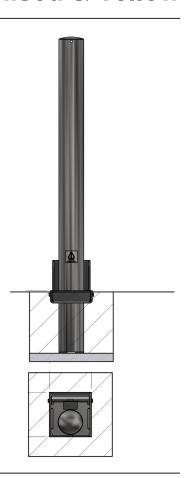

| Part Number | <u>Description</u> | <u>Lift Weight (kg)</u> | Weight (kg) |
|--------------|---------------------------|-------------------------|-------------|
| 138 121 126Y | 60mm Galvanised & Yellow | 6kg | 10kg |
| 138 121 213Y | 76mm Galvanised & Yellow | 7kg | 11kg |
| 138 121 281Y | 90mm Galvanised & Yellow | 8kg | 13kg |
| 138 121 302Y | 101mm Galvanised & Yellow | 10kg | 18kg |
| 138 121 411Y | 114mm Galvanised & Yellow | 11kg | 19kg |
| 138 121 509Y | 127mm Galvanised & Yellow | 12kg | 20kg |
| 138 121 601Y | 139mm Galvanised & Yellow | 22kg | 30kg |
| 138 121 667Y | 152mm Galvanised & Yellow | 14kg | 22kg |
| 138 121 708Y | 168mm Galvanised & Yellow | 26kg | 39kg |
| 138 121 810Y | 193mm Galvanised & Yellow | 31kg | 44kg |
| 138 121 919Y | 219mm Galvanised & Yellow | 35kg | 48kg |

Product details

- 1000mm (height above ground)
- 3mm wall thickness 60mm-127mm and 152mm
- 5mm wall thickness 139mm, 168mm 219mm
- Socket 220mm (below ground) 60mm 90mm diameter
- Socket 300mm (below ground) 101mm 219mm diameter
- · Price excludes padlock to secure

Installation & use

Bolt down to a suitable concrete surface.

Telescopic, removable and concrete in are supplied with welded fixing spikes to ensure firm ground anchorage into concrete.

Telescopic, removable and concrete in require a suitable excavated hole for installing into concrete.

Products are guaranteed for 12 months (if installed and used correctly).



www.autopa.co.uk +44 (0)1788 550556

