

Removable Bollard 900mm Above Ground 60mm - 193mm Diameter Galvanised & Yellow






The Removable Bollard offers an effective, simple and robust way to protect premises and vehicles. The simple tab and padlock system provides an easy to operate solution for locking the bollard in place. Removable Bollards are particularly suitable for locations where occasional access is required.

Yellow bollards are also suitable for use where high visability is paramount and can be used around pedestrian precincts, pavements, play and parking areas, as part of traffic calming measures, pedestrianisation schemes and as a deterrent to ram-raiders. The Removable Bollard is available in diameters from 60mm through to 193mm. Padlock to secure is available at an extra cost.

The Removable Bollard 900 is ideal for protecting vehicle forecourts, commercial premises, car parks and domestic driveways and can be used in conjunction with fixed bollards as part of a security system for all types of premises.

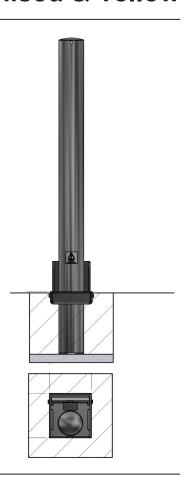

Part Number	<u>Description</u>	<u>Lift Weight (kg)</u>	Weight (kg)
138 121 115Y	60mm Galvanised & Yellow	5kg	9kg
138 121 250Y	76mm Galvanised & Yellow	6kg	10kg
138 121 291Y	90mm Galvanised & Yellow	7kg	11kg
138 121 310Y	101mm Galvanised & Yellow	9kg	17kg
138 121 435Y	114mm Galvanised & Yellow	10kg	18kg
138 121 526Y	127mm Galvanised & Yellow	11kg	19kg
138 121 622Y	139mm Galvanised & Yellow	20kg	28kg
138 121 665Y	152mm Galvanised & Yellow	13kg	21kg
138 121 699Y	168mm Galvanised & Yellow	24kg	36kg
138 121 795Y	193mm Galvanised & Yellow	28kg	41kg

Product details

- 900mm (height above ground)
- 3mm wall thickness 60mm-127mm and 152mm
- 5mm wall thickness 139mm, 168mm, and 193mm
- Socket 220mm (below ground) 60mm 90mm diameter
- Socket 300mm (below ground) 101mm 193mm diameter
- · Price excludes padlock to secure

Installation & use

Bolt down to a suitable concrete surface.

Telescopic, removable and concrete in are supplied with welded fixing spikes to ensure firm ground anchorage into concrete.

Telescopic, removable and concrete in require a suitable excavated hole for installing into concrete.

Products are guaranteed for 12 months (if installed and used correctly).



www.autopa.co.uk +44 (0)1788 550556

