




Plain Round Bollard 1500mm Above Ground 168mm - 323mm Diameter Galvanised & Yellow - Concrete In

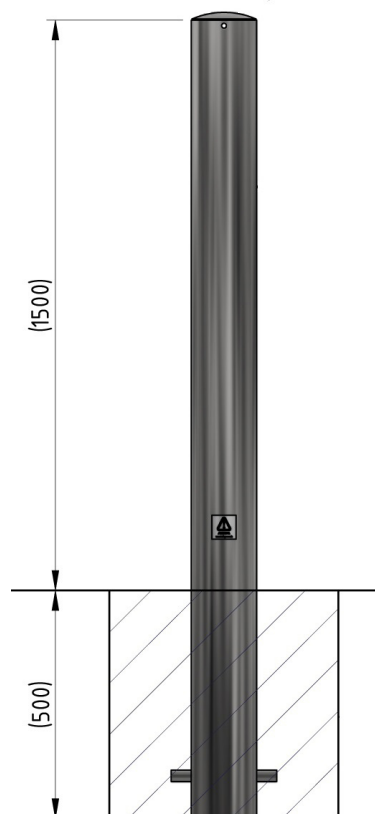

AUTOPA's range of Plain Round Bollards offers a simple and cost effective means of establishing control over parking and access. Plain Round Bollards are ideal for use around pedestrian precincts, pavements, play and parking areas, as part of traffic calming measures, pedestrianisation schemes and as a deterrent to ram-raiders.

The complete range of Plain Round Bollards is available in diameters from 76mm to 323mm and is available with extended legs for casting into concrete or with a flange plate for bolting down.

Additional colour coated versions are also available.

Part Number	Diameter	Weight (kg)
138 121 714Y	168mm Galvanised & Yellow	40kg
138 121 808Y	193mm Galvanised & Yellow	47kg
138 121 918Y	219mm Galvanised & Yellow	53kg
138 122 105Y	273mm Galvanised & Yellow	83kg
138 122 205Y	323mm Galvanised & Yellow	99kg

Product details

- 5mm wall thickness - 168mm - 219mm
- 6.3mm wall thickness - 273mm - 323mm
- Concrete in 500mm (below ground)
- Complete with a welded steel cap

Installation & use

Bolt down to a suitable concrete surface.

Telescopic, removable and concrete in are supplied with welded fixing spikes to ensure firm ground anchorage into concrete.

Telescopic, removable and concrete in require a suitable excavated hole for installing into concrete.

Products are guaranteed for 12 months (if installed and used correctly).



www.autopa.co.uk
+44 (0)1788 550556

AUTOPA Limited
Cottage Leap, Rugby, Warwickshire CV21 3XP

